



Notice: Unless otherwise stated the following applies

Sharp edges removed	General tol. acc. to ISO 2768-1/m , ISO 2768-2/K				Rough castings ±1,0mm	
Nom. measurement	< 6	< 30	< 120	< 400	< 1000	M-thread 6H/6g - ISO965
Deviation	± 0,1	± 0,2	± 0,3	± 0,5	± 0,8	Tol. for out / inside diameter h11 / H11

B (1 : 2)

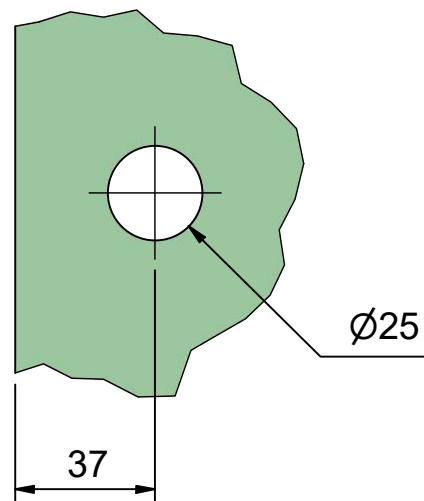

Glass
10mm toughened GBK

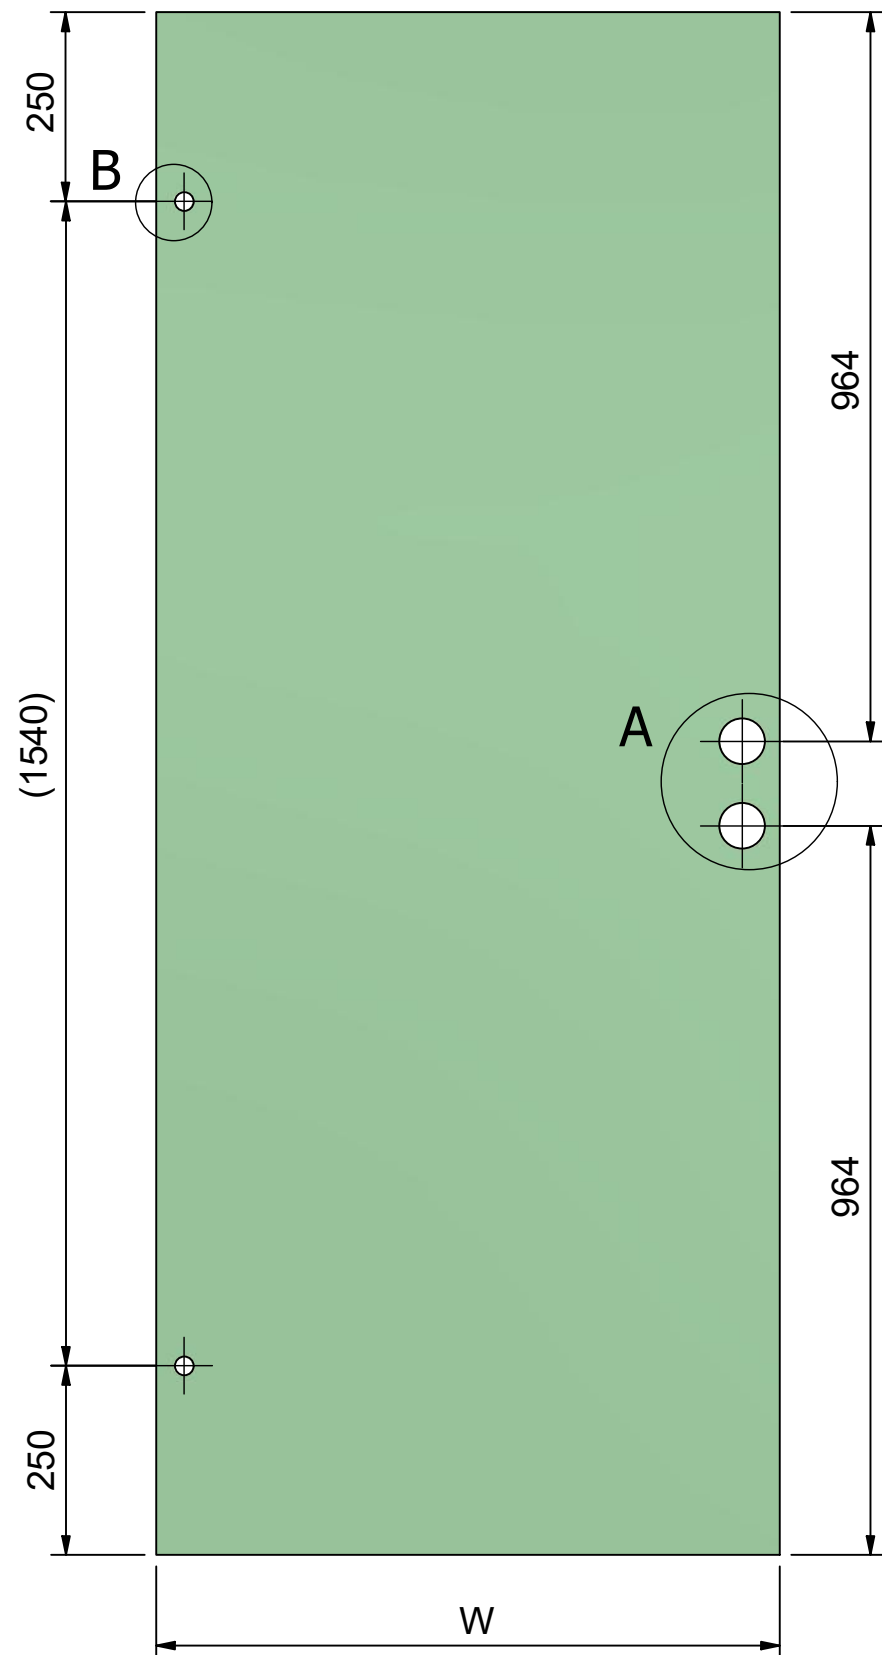

A (1 : 2)

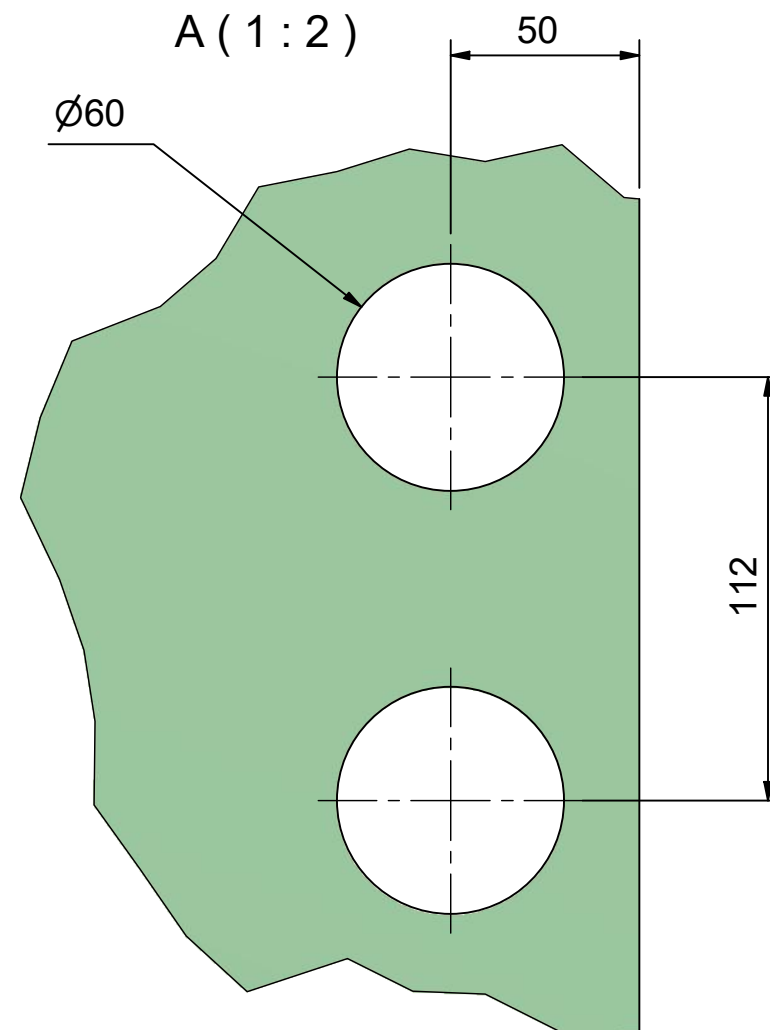


Table	
Item	W
860941	725
860942	825
860943	925

Material Glass		Colour	Scale 1 : 10	Date 2019-10-04
Surface treatment		Volume 16763633,86 mm ³	Item no. 860941-43	
Design AG	Checked	Replaces	Weight 36544,722 g	Status A - Only for price inquiry B - Only for production of tooling and samples P - Approved for production P
Glass door 10mm RG-585, for lock fitting RG-470			Rev. 1	Drawing no. 860941



ROCA