


Sketch below show a 10mm glass application.

Important! The side panel shall be pushed into the frame with **15mm** and to the el-zone **20mm** to provide the door maximum stability.



RG-580 with EI-zone RG-530

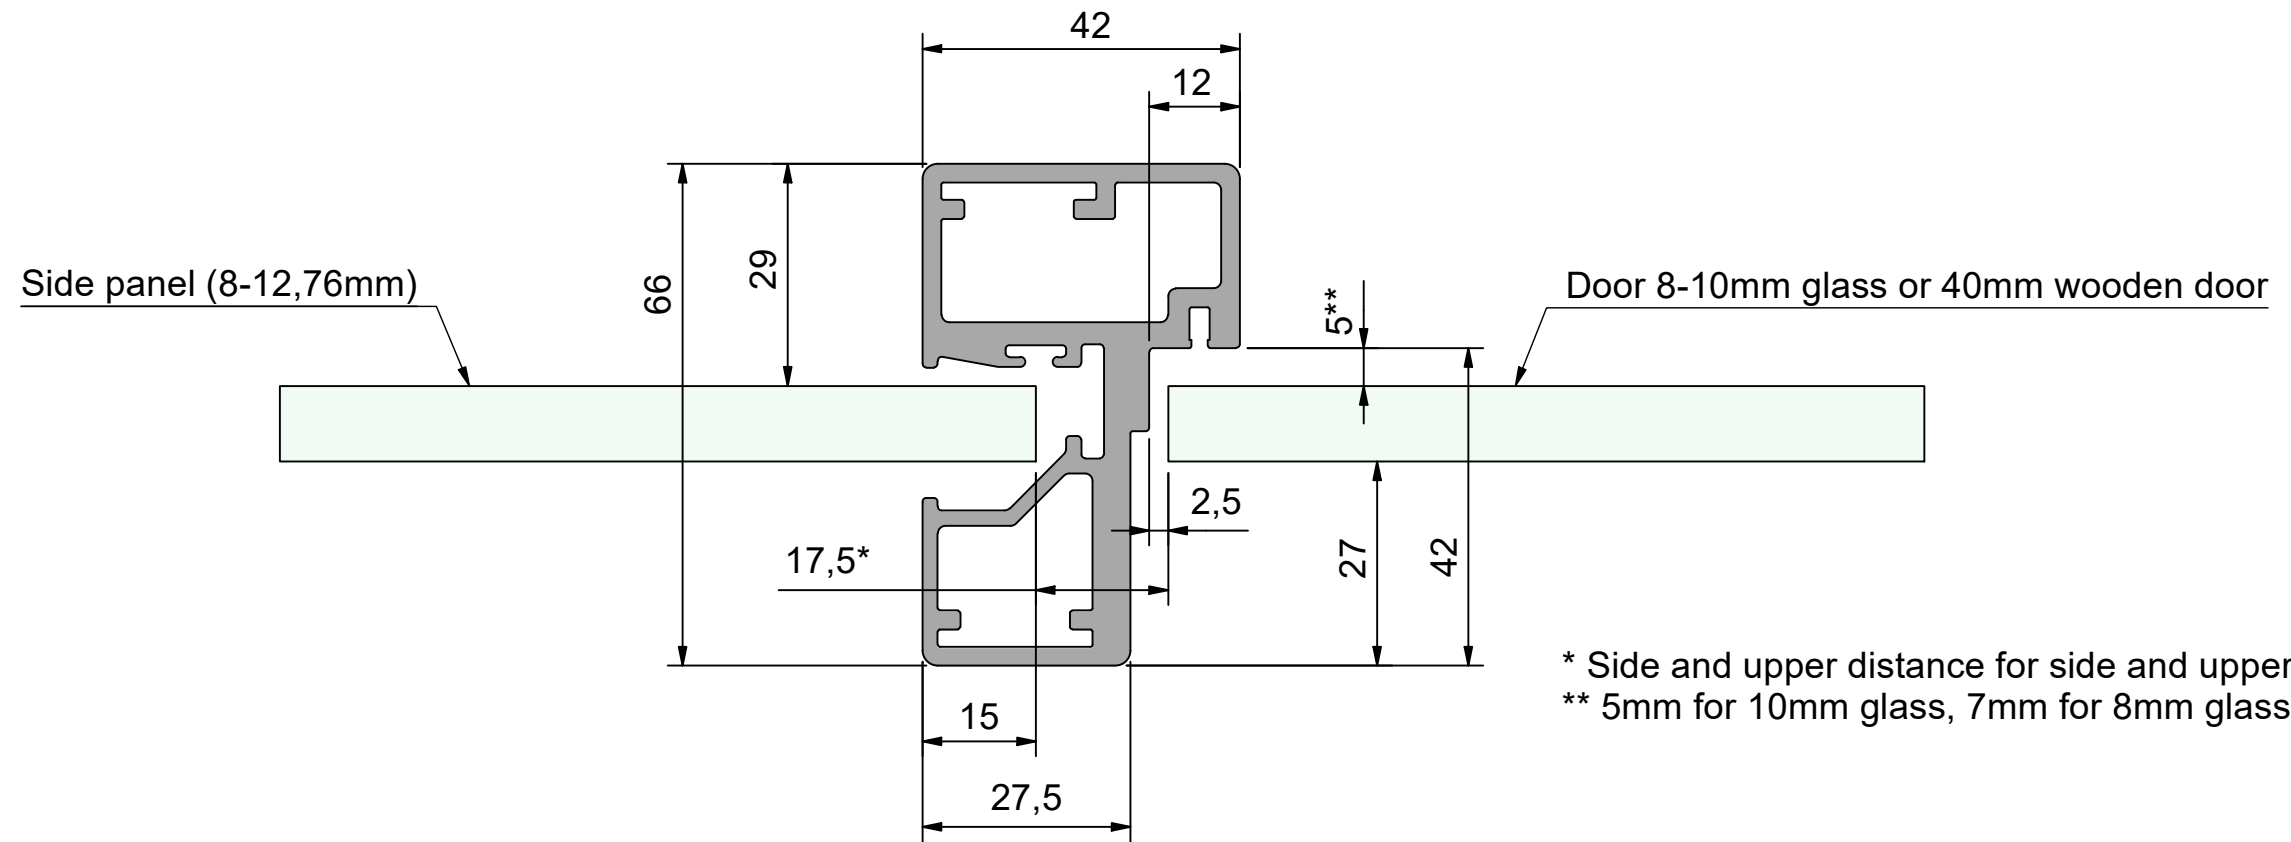